


Analysis of Voriconazole

(Under the Condition of the draft for USP, Voriconazole for Injection)

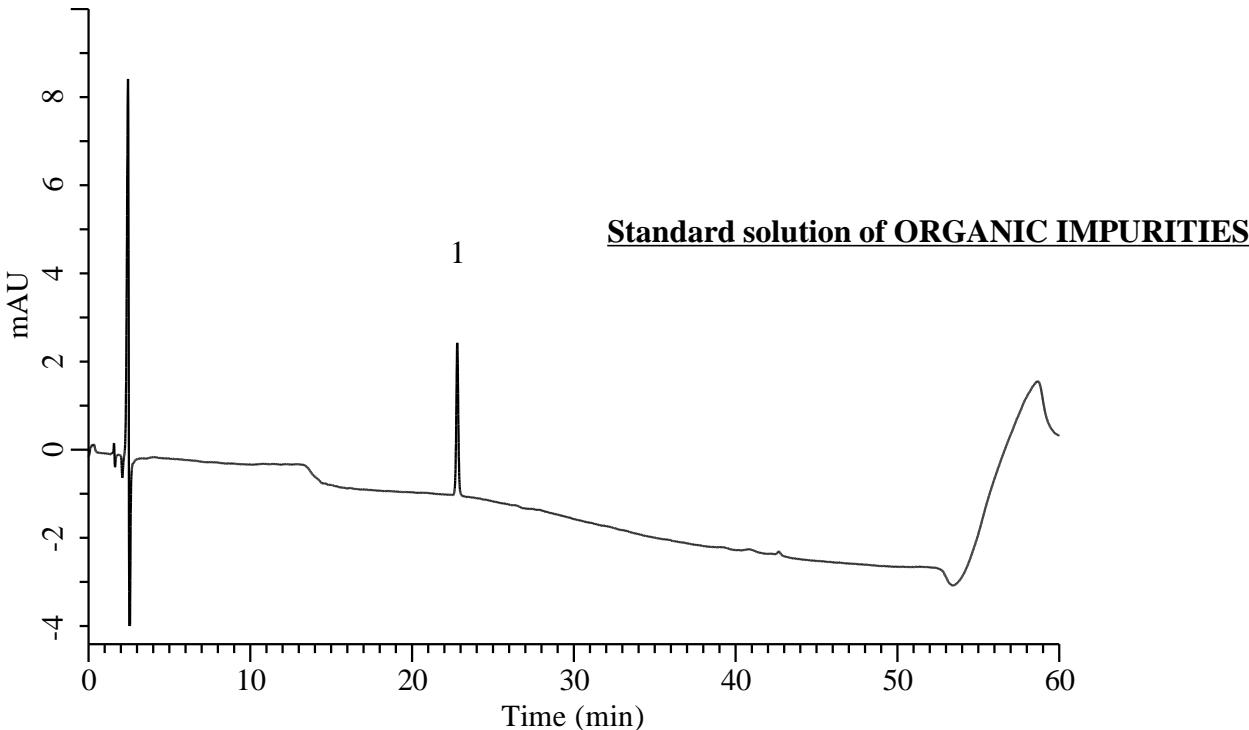

Conditions

System : Chromaster HPLC system (HITACHI)

Column : InertSustain C18 (GL Sciences Inc.)
(3.5 μ m, 150 x 4.6 mm I.D.)

Column Cat. No. : 5020-89996

Eluent : A) CH₃CN
B) Solution *

Time (min)	A (vol %)	B (vol %)
0.0	25.0	75.0
10.0	25.0	75.0
30.0	60.0	40.0
40.0	70.0	30.0
50.0	70.0	30.0
55.0	25.0	75.0
60.0	25.0	75.0

Flow Rate : 1.0 mL/min

Col. Temp. : 30 °C

Detection : UV 256 nm (5430 DAD)

Injection Vol. : 20 μ L

Sample : Standard

Analyte:

1. Voriconazole 0.08 mg/mL

RSD of the
peak area (%)(n=6) : 0.44 (\leq 1.0)

Signal-to-noise ratio : 57.7 (\geq 10)

* Dissolve 0.63 g of ammonium for mate in 1000 mL of water. Adjust with for mic acid to a pH of 4.0.